



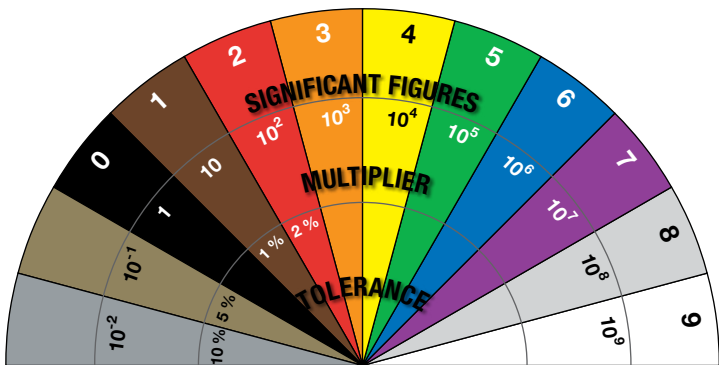

RESISTOR COLOR CODE CHART

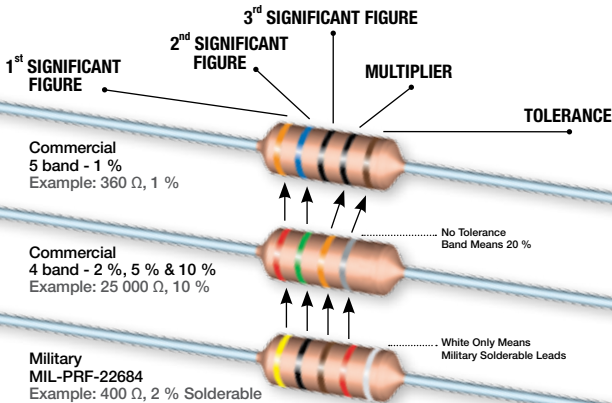

One of the World's Largest Manufacturers of
Discrete Semiconductors and Passive Components

Get more from <http://www.getforms.org>

www.vishay.com



STANDARD RESISTANCE VALUES

E192		E96		E192		E96		E192		E96	
0.1 %, 0.25 %, 1 %		0.1 %, 0.25 %		0.1 %, 0.25 %, 1 %		0.1 %, 0.25 %, 1 %		0.1 %, 0.25 %, 1 %		0.1 %, 0.25 %, 1 %	
0.5 %		0.5 %		0.5 %		0.5 %		0.5 %		0.5 %	
10.0	10.0	16.9	16.9	28.7	28.7	48.1		81.6			
10.1		17.2		29.1		48.7	48.7	82.5	82.5		
10.2	10.2	17.4	17.4	29.4	29.4	49.3		83.5			
10.4		17.6		29.8		49.9	49.9	84.5	84.5		
10.5	10.5	17.8	17.8	30.1	30.1	50.5		85.6			
10.6		18.0		30.5		51.1	51.1	86.6	86.6		
10.7	10.7	18.2	18.2	30.9	30.9	51.7		87.6			
10.9		18.4		31.2		52.3	52.3	88.7	88.7		
11.0	11.0	18.7	18.7	31.6	31.6	53.0		89.8			
11.1		18.9		32.0		53.6	53.6	90.9	90.9		
11.3	11.3	19.1	19.1	32.4	32.4	54.2		92.0			
11.4		19.3		32.8		54.9	54.9	93.1	93.1		
11.5	11.5	19.6	19.6	33.2	33.2	55.6		94.2			
11.7		19.8		33.6		56.2	56.2	95.3	95.3		
11.8	11.8	20.0	20.0	34.0	34.0	56.9		96.5			
12.0		20.3		34.4		57.6	57.6	97.6	97.6		
12.1	12.1	20.5	20.5	34.8	34.8	58.3		98.8			
12.3		20.8		35.2		59.0	59.0				
12.4	12.4	21.0	21.0	35.7	35.7	59.7					
12.6		21.3		36.1		60.4	60.4				
12.7	12.7	21.5	21.5	36.5	36.5	61.2					
12.9		21.8		37.0		61.9	61.9	10	10		
13.0	13.0	22.1	22.1	37.4	37.4	62.6		11	–		
13.2		22.3		37.9		63.4	63.4	12	12		
13.3	13.3	22.6	22.6	38.3	38.3	64.2		13	–		
13.5		22.9		38.8		64.9	64.9	15	15		
13.7	13.7	23.2	23.2	39.2	39.2	65.7		16	–		
13.8		23.4		39.7		66.5	66.5	18	18		
14.0	14.0	23.7	23.7	40.2	40.2	67.3		20	–		
14.2		24.0		40.7		68.1	68.1	22	22		
14.3	14.3	24.3	24.3	41.2	41.2	69.0		24	–		
14.5		24.6		41.7		69.8	69.8	27	27		
14.7	14.7	24.9	24.9	42.2	42.2	70.6		30	–		
14.9		25.2		42.7		71.5	71.5	33	33		
15.0	15.0	25.5	25.5	43.2	43.2	72.3		36	–		
15.2		25.8		43.7		73.2	73.2	39	39		
15.4	15.4	26.1	26.1	44.2	44.2	74.1		43	–		
15.6		26.4		44.8		75.0	75.0	47	47		
15.8	15.8	26.7	26.7	45.3	45.3	75.9		51	–		
16.0		27.1		45.9		76.8	76.8	56	56		
16.2	16.2	27.4	27.4	46.4	46.4	77.7		62	–		
16.4		27.7		47.0		78.7	78.7	68	68		
16.5	16.5	28.0	28.0	47.5	47.5	79.6		75	–		
16.7		28.4				80.6	80.6	82	82		
								91	–		

Standard resistance values are obtained from the decade table by multiplying or dividing by powers of 10. As an example, 13.3 can represent 0.133 Ω, 1.33 Ω, 13.3 Ω, 133 Ω, 1.33 kΩ, 13.3 kΩ, 133 kΩ, or 1.33 MΩ.

- B = 0.1 %
- C = 0.25 %
- D = 0.5 %
- F = 1 %
- G = 2 %
- J = 5 %
- K = 10 %